


# HV-6404V

## 4CH H.264 Stand-Alone Network DVR

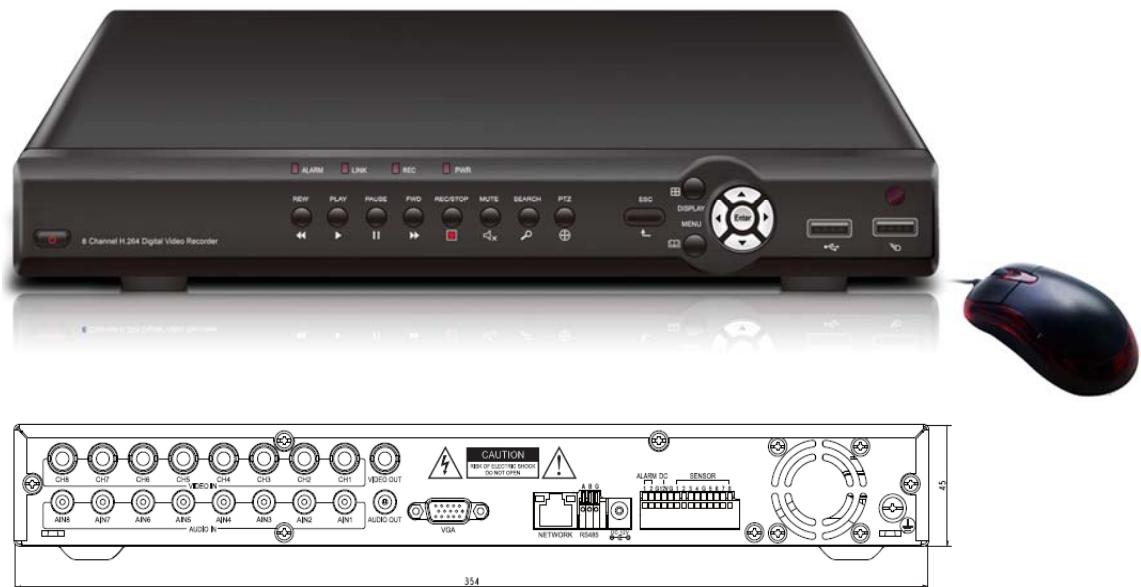

### Features

- ◆ Adopts the standard Main profile H.264 compression technology, D1 and CIF can be adjusted supports 4ch recording, Network transmission, and playback simultaneously
- ◆ Support dual-stream transmission for all channels
- ◆ Support Multiplex operation: live, record, playback, backup, network transmission, mobile phone surveillance
- ◆ Support backup with USB Flash Disk, Movable hard disc writer, Network
- ◆ Support 1channel. Main output, 1channel. VGA output
- ◆ Support password watermark function to avoid data modification
- ◆ Support Action with Alarm and pre-alarm recording function
- ◆ Support Email alarm
- ◆ Mobile phone surveillance (Win CE/Symbian/iPhone/Blackberry)
- ◆ Support Multi-language OSD
- ◆ Support mouse, remoter controller, panel operating

## Specifications

Model Name	HV-6404V
Operating System	Embedded Linux OS
Video Compression Format	Main Profile H.264
Video Input	4 Channels BNC
Video Output	1 Channel BNC, 1 Channel VGA(1280*1024)
Audio Input/Output	4 Channel RCA/1 Channel RCA
Display Picture	1/4
Multiplex Operation	Live\display\Playback\Recording\Backup\ Mobile phone Surveillance \Network simultaneously
Display Resolution	PAL:D1(704*576),NTSC:D1 ( 704*480)
Recording Mode	Manual\Timer\Motion Detection\Alarm
Recording Frame Rate	D1@100fps,HD1@100fps,CIF@100fps adjustable
Recording Resolution	PAL:D1(704*576),HD1(704*288),CIF(352*288), NTSC:D1(704*480),HD1(704*240),CIF(352*240)
Recording Playback	1/4 channel playback simultaneously (Optional playback channel)
Recording Backup	USB、 Moved Hard Disk、 USB Writer、 Network
Network Transmission	4Channels real-time Network transmission with CIF resolution
Recording Play	Special player, Support AVI file format conversion
JPEG Capture function	Support,3M Pixels@10fps
Alarm Input/Output	4 channels input, 1 channel output
Action with Alarm	Support
Email Alarm	Send pieces to the designated email
PTZ	Supports (PELCO-D,PELCO-P)
HDD	Support 1 SATA HDD, capacity to 2T
Network and Protocol	1 RJ-45 10/100M via Ethernet, Support TCP/IP、 PPPOE、 DHCP、 DNS、 DDNS、 NTP、 UPNP
IE Browser	Support
Client Software	Support
Dual Stream	Support (Main and secondary interchange)
Group play	Max Support five users online access
Watermark	Support
Multi-language	Support
Mobile Phone Surveillance	Support Windows\ Symbian\ iPhone\Blackberry Operation System
Mouse Interface	USB2.0
Backup interface	USB2.0
Remote Controller	Support (Supports controller ID matching)
DST	Support
Power	DC12V/3A
Working Temperature	0°C-50°C
Working Humidity	10% – 90%
Dimension	354(W)×230(D)×45(H)

*Design and specifications are subject to change without notice.*